

■ Product advantages

- 100 lm/W system efficacy
- Mercury Free
- Instant illumination
- Extremely thin and unobtrusive design
- Absolutely homogeneous light emission on the complete surface
- Very powerful and efficient for general illuminating tasks

■ Features


| Model No | Globus-200 | Globus-150 |
|-----------------------------|------------|------------|
| Operating Voltage (V) | 100-277V | 100-277V |
| Rated Wattage (W) | 12 | 12 |
| Frequency (Hz) | 50/60Hz | 50/60Hz |
| Input Current (mA max.) | 110 | 110 |
| Power Factor | ≥0.9 | ≥0.9 |
| Luminous Flux (lm) | 1200 | 1200 |
| Colour Rendering Index (Ra) | >80 | >80 |
| CCT (K) | 5000 | 5000 |
| Lamp Efficacy (lm / W) | 100 | 100 |
| Rated Lamp Lifetime (h) | 30 000 | 30 000 |
| Lumen maintenance factor | L70 | L70 |
| Starting time | <0.5s | <0.5s |
| Dimming | Optional | Optional |
| Operating temperature | -0 ~ 50°C | -0 ~ 50°C |

■ Features

| | Globus-200 | Globus-150 |
|-------------------|---------------------|---------------------|
| Material/Color | Polycarbonate/White | Polycarbonate/White |
| IP Rating | IP 20 | IP 20 |
| Dimensions (mm) | 200 x 200 mm | 150 mm |
| Net Weight (g) | 1 Kg | 1 Kg |

■Packaging details

| | | |
|---------------------|------------|-----------------------|
| Gross weight (Kg) 1 | Globus-200 | 1pc 250 x 250 x 50 mm |
| Gross weight (Kg) 1 | Globus-150 | 1pc 200 x 200 x 50 mm |

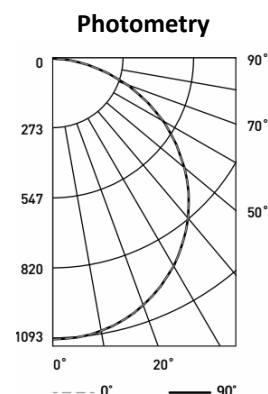

*Due to continuous improvements, technical specifications are subject to change without prior notice.