

■ Product advantages

- 100 lm/W system efficacy
- Mercury Free
- Instant illumination
- Perfect integration into 600 mm or 300mm grid ceilings
- Extremely thin and unobtrusive design
- Absolutely homogeneous light emission on the complete surface
- Very powerful and efficient for general illuminating tasks

■ Features

Model No	Regale-2x2	Regale-1x4
Operating Voltage (V)	100-277V	100-277V
Rated Wattage (W)	36	36
Frequency (Hz)	50/60Hz	50/60Hz
Input Current (mA max.)	360	360
Power Factor	≥0.9	≥0.9
Luminous Flux (lm)	3600	3600
Colour Rendering Index (Ra)	>80	>80
CCT (K)	5000	5000
Lamp Efficacy (lm / W)	100	100
Rated Lamp Lifetime (h)	30 000	30 000
Lumen maintenance factor	L70	L70
Starting time	<0.5s	<0.5s
Dimming	Optional	Optional
Operating temperature	-0 ~ 50°C	-0 ~ 50°C

■ Features


	2x2	1x4
Material/Color	Polycarbonate/White	Polycarbonate/White
IP Rating	IP 20	IP 20
Dimensions (mm)	597 x 597 x 55 mm	297 x 1194 x 55 mm
Net Weight (g)	4 Kg	4 Kg

■Packaging details

Gross weight (g) 4500	2x2	1pc 700 X 700 X 80 mm
Gross weight (g) 4500	1x4	1pc 300 X 1300 X 80 mm



Photometry

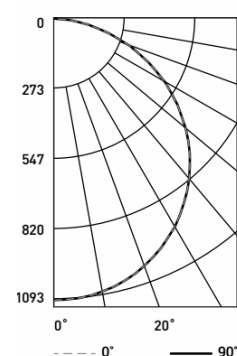

*Due to continuous improvements, technical specifications are subject to change without prior notice.